

## Bioconversion of Glycerol from Biodiesel Production to Ethanol by *Enterobacter aerogenes* TISTR 1468

Pornpun Siramon<sup>1\*</sup> and Klanarong Sriroth<sup>2</sup>

<sup>1</sup>King Mongkut's University of Technology Thonburi (Ratchaburi Campus), Ratchaburi, 70150, Thailand.

<sup>2</sup>Department of Biotechnology, Faculty of Agro-Industry, Kasetsart University, Bangkok 10900, Thailand.

<https://doi.org/10.22207/JPAM.10.3.12>

(Received: 14 June 2016; accepted: 03 August 2016)

The objective of this study is to examine the potential applications of glycerol, a by-product derived from *Jatropha* biodiesel production, via bioconversion into ethanol by *Enterobacter aerogenes* TISTR 1468. The purity of crude glycerol sample can be enhanced using sulfuric acid in varying concentrations. It was found that the addition by weight of 5% sulfuric acid could increase the glycerol purity from 27.68% to 94.43% with 65.42% of glycerol yield. Once purified, the glycerol sample was applied at 30 g/L to form the carbon substrate required in the anaerobic fermentation process by which ethanol can be obtained through the use of *E. aerogenes* for 120 hours at a constant 37 °C. Under these conditions, purified glycerol yielded 8.39 g/L ethanol while crude glycerol yielded 6.54 g/L ethanol. The ethanol produced via this approach was shown to be highly efficient in comparison with commercial glycerol with purity at 99.5%, which produced 7.46 g/L ethanol under the same condition.

**Keywords:** Biodiesel production, Crude glycerol, *Enterobacter aerogenes*, Ethanol, *Jatropha curcas* L.

Dwindling oil reserves allied to environmental concerns have resulted in increasing interest in alternative energy sources such as biodiesel or bioethanol. These sources are considered sustainable and less harmful to the environment, with biodiesel at the forefront of the current surge in global interest<sup>1,2,3,4,5</sup>. The transesterification of vegetable oils or animals fats is the principal means of producing biodiesel, and offers the benefit of using renewable materials in contrast with regular diesel. Furthermore, the biofuel is sulfur-free, non-toxic, and generates lower levels of carcinogenic pollution<sup>6</sup>.

Biodiesel production in Thailand is dependent upon two plant species: *Elaeis guineensis* and *Jatropha curcas* Linn. It has been proposed that *Jatropha* oil biodiesel might serve as a substitute for at least a part of the diesel fuel

currently used in Thailand for transport purposes<sup>7</sup>. This biodiesel production process leads to the creation of around 10% (w/w) glycerol as the primary by-product, although a number of impurities are present, such as soap, fatty acids, methanol, salts, water and other non-glycerol substances, depending on the catalysts and feedstock used in the procedure<sup>8,9</sup>. These impurities lower the value of the crude glycerol obtained, and even safe disposal requires pre-treatment. As the demand for biodiesel has risen, the quantities of low-grade glycerol as a by-product have also increased, so there are undoubtedly advantages to be found in any method which allows its conversion to a higher value product, both in economic terms and also with regard to the environmental benefits.

Glycerol, 1,2,3-propanetriol, is a trihydric alcohol which has a wide range of uses across various industries such as food and drinks, drugs, pharmaceuticals, cosmetics, toothpaste, toiletries, plastics, tobacco, pulp and paper, paint, leather,

\* To whom all correspondence should be addressed.  
E-mail: siramon\_p@hotmail.com

textile, lubricants and automotive<sup>10,11</sup>. However, to use it in these applications is necessary a degree of glycerol purity higher than 95%<sup>2,12</sup>.

It is thus necessary to develop a means of using the by-product glycerol generated from biodiesel production, by removing the impurities in order to meet the requirements of industry<sup>8</sup>. The idea of converting waste glycerol into a more useful product has become very interesting, and the method of using microbes to perform the conversion has been suggested as an effective and sustainable option, which helpfully avoids the use of chemicals. There is also no need for high energy input or complex pre-treatment, so the approach can be considered highly advantageous<sup>13,14,15,16</sup>. It has been noted that a number of microbes are able to convert waste glycerol into more useful products, including ethanol<sup>10,17</sup>, methane<sup>18</sup>, 1,3-propanediol<sup>19</sup>, citric acid<sup>20</sup>, succinic acid<sup>21</sup> and hydrogen<sup>22,23</sup>. The bioconversion of glycerol into ethanol is of particular interest due to it is widely used in many industries as solvents and also can be used as an alternative fuel for vehicles<sup>3,6</sup>. To obtain ethanol as the principal product from glycerol, *Enterobacter aerogenes*, which is a gram-negative species and member of the Enterobacteriaceae family is the ideal choice<sup>3,12,24</sup>.

Given the information thus far, the aim of this research was to examine bio-ethanol production using anaerobic fermentation techniques with *E. aerogenes* TISTR 1468 and glycerol derived as a by-product of the *Jatropha* biodiesel production.

## MATERIALS AND METHODS

### Glycerol sample

The sample of crude glycerol was derived from biodiesel production involving the transesterification of 50 kg *Jatropha* oil and 10 L of methanol, using potassium hydroxide as the catalyst. The chemical composition of the isolated crude glycerol was then examined. The commercial glycerol used in the study was obtained from Ajax Finechem (Australia) and had a purity of 99.5%.

### Purification of crude glycerol

Having acquired the crude glycerol, it was subsequently treated with sulfuric acid in order to raise the level of purity. This process commenced by lowering the viscosity by dissolving the

glycerol in methanol. Sulfuric acid (96%, Carlo Erba, Italy) was then added in five differing concentrations: 3%, 4%, 5%, 6%, and 7% (w/w). The resulting mixture was then stirred for 30 minutes at 400 rpm. Separation of the mixture was then performed using a separatory funnel, and the product was permitted to stand for several hours. This allowed the mixture to form three separate layers, comprising salts at the bottom, glycerol in the middle, and methyl ester on the top. Since the glycerol was the layer of interest, it was then separated out of the mixture and analyzed in order to determine the ideal concentration of sulfuric acid to achieve the best purification outcome.

The purified crude glycerol sample which was deemed to represent the best outcome in terms of purification was then selected as the carbon substrate in the ethanol fermentation process.

### Microorganism and culture conditions

**Microorganism:** A strain of bacterium *Enterobacter aerogenes* TISTR 1468 was obtained from the Thailand Institute of Scientific and Technological Research, Bangkok, Thailand.

**Medium:** The preculture medium comprised commercial glycerol 15 g, tryptone 5 g, K<sub>2</sub>HPO<sub>4</sub> 14 g, KH<sub>2</sub>PO<sub>4</sub> 6 g, (NH<sub>4</sub>)<sub>2</sub>SO<sub>4</sub> 2 g, MgSO<sub>4</sub>·7H<sub>2</sub>O 0.2 g per litre of distilled water.

**Cultivation conditions:** *E. aerogenes* TISTR 1468 from the agar slant was inoculated into 100 ml of the preculture medium in a 250 ml flask and cultivated on a rotary shaker at 150 rpm and 37 °C for 12 hours.

### Ethanol production via fermentation

The process requires the starter culture (2% v/v) to be introduced to the fermentation medium (50 ml) in 125 ml serum bottles. The fermentation medium had the same composition as the preculture medium except that 30 g of crude and purified glycerol (from the best purification condition) were used instead of commercial glycerol. The assessment of the optimal glycerol concentration to use as the carbon sources in the fermentation process, the concentrations of commercial glycerol were varied at 10, 20, 30, 40, and 50 g/L. The serum bottles were tightly sealed with rubber stoppers and were flushed with N<sub>2</sub> gas to create anaerobic conditions. Each bottle was subsequently incubated using a water bath shaker at 37 °C for 120 hours at an agitation speed of 60 rpm. Sampling for analysis of the concentrations

of ethanol and glycerol in fermentation broth were performed at every 24 hours interval. All treatments were conducted in triplicates.

#### Analysis methods

##### Glycerol sample characterization

The sample of crude glycerol was characterized by its contents of glycerol, methanol, ash, water and matter organic non-glycerol (MONG). Further analysis was carried out with regard to pH and the infrared spectrum, as described below:

##### Glycerol and methanol

High Performance Liquid Chromatography (HPLC, Shimadzu, Japan) was used to examine the glycerol and methanol contents in the samples. Analysis was performed with a refractive index (RI) detector using an Aminex HPX-87H ion exclusion column (300 x 7.8 mm, Bio-Rad, USA) at a constant 60 °C. For the mobile phase, 5 mM H<sub>2</sub>SO<sub>4</sub> was used with a flow rate of 0.6 ml/min.

##### Ash

Analysis of the ash content was accomplished by burning 1 g glycerol sample in a furnace at 750±10 °C for 10 minutes (ISO 2098-1972).

##### Water

Volumetric Karl Fischer titration was used to evaluate the water content (ISO 2097-1972).

##### Matter Organic Non-Glycerol (MONG)

To determine MONG, the percentages of glycerol, methanol, ash and water are subtracted from 100%.

##### pH

The pH values were determined by measuring a solution comprising 20 g glycerol sample in 100 ml distilled water.

##### Fourier transforms infrared (FT-IR) analysis

An Attenuated Total Reflection Fourier Transform Infrared Spectrometer (ATR-FTIR, diamond ATR) (Nicolet IR200, USA) was used to determine the infrared spectrum of crude glycerol, commercial glycerol, and purified glycerol.

##### Analysis of ethanol and glycerol contents in fermentation broth

HPLC was used to analyze the concentrations of ethanol and glycerol in samples of the fermentation broth, under conditions identical to those used in the analysis of the glycerol and methanol contents in the crude glycerol sample.

## RESULTS AND DISCUSSION

### Characterization of glycerol sample

The typical appearance of crude glycerol produced as a by-product of biodiesel obtained through the transesterification of *jatropha* oil using potassium hydroxide as the alkali catalyst was dark brown, while the pH values were high (11.8). The chemical compositions of the crude glycerol sample are shown in Table 1. HPLC and FT-IR were employed to determine the purity and the compositions of glycerol sample as shown in Fig. 1 and Fig. 2. The chemical composition analysis showed that the crude glycerol sample contained 27.68% (w/w) glycerol. Methanol, ash, water and MONG were present as impurities in the sample.

The infrared spectrum of the crude glycerol was recorded and compared to that from commercial glycerol [Fig. 2 (a), (b)]. Crude glycerol was revealed to contain a number of impurities which could be observed at the absorption frequency at 1580 cm<sup>-1</sup> (COO- functionality) and at 1750 cm<sup>-1</sup> (C=O functionality). These indications correlate respectively with soap and free fatty acids. In the commercial glycerol sample, these impurities could not be observed. The absorption

**Table 1.** Chemical composition of the crude glycerol sample

| Component                          | Percentage (w/w)* |
|------------------------------------|-------------------|
| Glycerol                           | 27.68             |
| Methanol                           | 12.53             |
| Ash                                | 5.30              |
| Water                              | 2.00              |
| Matter organic non-glycerol (MONG) | 52.49             |

\* based on the weight of the glycerol sample

**Table 2.** Percentage purities of the glycerol samples after purification at different conditions

| Sulfuric acid concentration (% w/w) * | Purity (%) |
|---------------------------------------|------------|
| 3                                     | 62.08      |
| 4                                     | 87.72      |
| 5                                     | 94.43      |
| 6                                     | 91.09      |
| 7                                     | 90.28      |

\* based on the weight of the glycerol samples

frequency at  $1500\text{--}1200\text{ cm}^{-1}$  confirmed the glycerolic moiety of the pure glycerol, and can be explained by the manner in which the C-H in-planes and the O-H bending overlap within the glycerol molecules. OH stretching was noted at  $3500\text{--}3000\text{ cm}^{-1}$  and  $1600\text{ cm}^{-1}$ , confirming the existence in every sample of the OH group<sup>25</sup>.

#### Purification of crude glycerol

The crude glycerol was purified using sulfuric acid at five different concentrations. This allowed the most effective concentration to be determined. The results of HPLC analysis revealed

that 5% sulfuric acid by weight gave the best outcome, raising the purity level to 94.43% [Fig. 1 (b), Table 2]. Figure 2 (c) showed the infrared spectrum of the glycerol after purification. The results appear similar to those for commercial glycerol.

#### Fermentation for ethanol production

#### The optimal glycerol concentration for fermentation

It was necessary to record the ideal initial glycerol concentration to be used in the fermentation process involving *E. aerogenes*

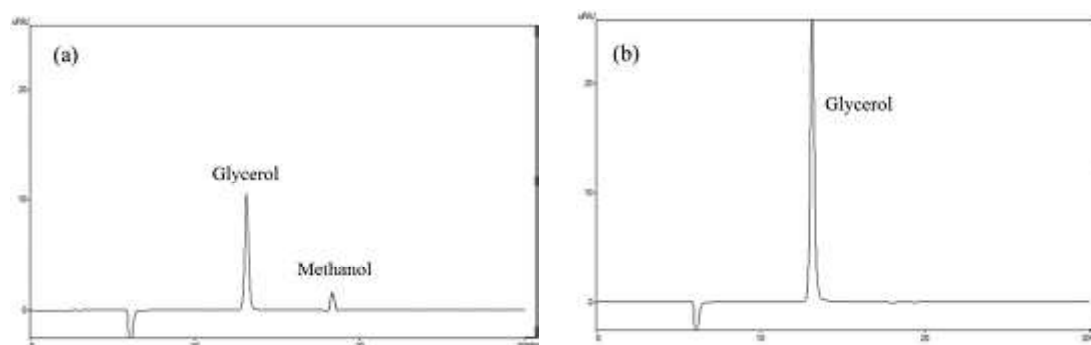


Fig. 1. HPLC chromatograms of (a) crude glycerol and (b) purified glycerol



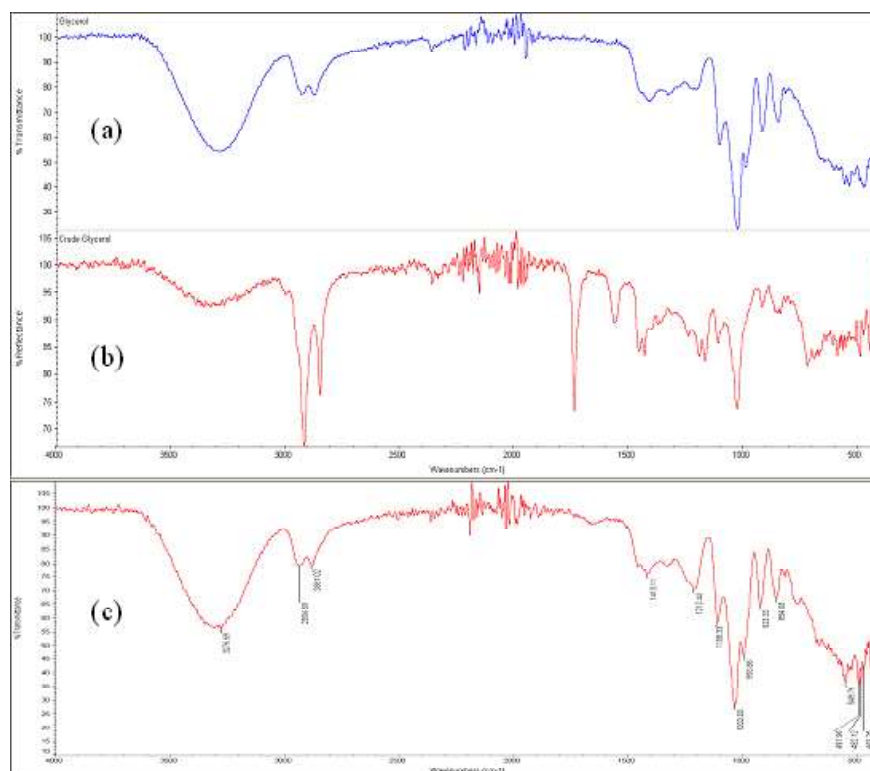


Fig. 2. FT-IR spectra of (a) commercial glycerol (b) crude glycerol and (c) purified glycerol


TISTR 1468. Therefore, the fermentation process used five different concentrations of commercial glycerol (10-50 g/L) as the carbon source in order to carry out the evaluation. The fermentation was undertaken with serum bottles (125 ml) which contained the cultivation medium (50 ml). These were placed in a water bath shaker at an agitation speed of 60 rpm and maintained at 37 °C for 120 hours. Figure 3 showed how the initial glycerol concentration affects glycerol consumption and

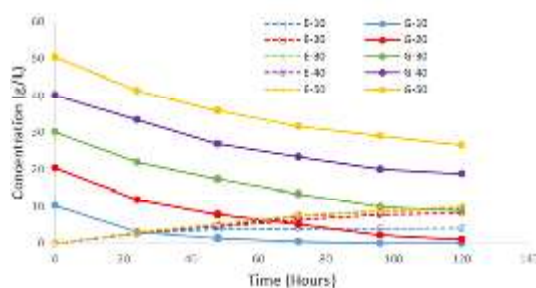

**Fig. 3.** The effects on glycerol consumption and ethanol production of the initial glycerol concentration during the fermentation of *E. aerogenes* at 37 °C for 120 hours

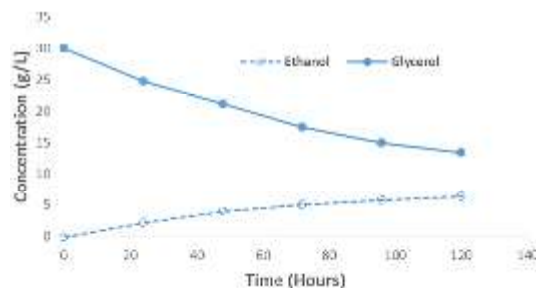

**Fig. 4.** Concentrations of ethanol and glycerol in fermentation broths during the fermentation using 30 g/L crude glycerol at 37 °C for 120 hours

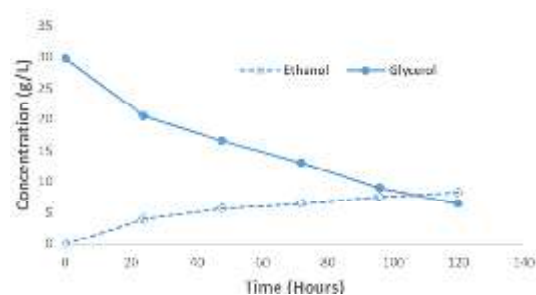

**Fig. 5.** Concentrations of ethanol and glycerol in fermentation broths during the fermentation using 30 g/L purified glycerol at 37 °C for 120 hours

the production of ethanol during the cultivation of *E. aerogenes*. During fermentation, it also produced  $H_2$  (g) and some acid products at the same time<sup>24</sup>. The outcome confirmed that the most suitable concentration for glycerol in order to create the greatest ethanol concentration was 30 g/L at 120 hours, which resulted in a concentration level of 7.46 g/L.

#### Fermentation of crude and purified glycerol for ethanol production

Ethanol production levels of 6.54 and 8.39 g/L were recorded for crude and purified glycerol at 30 g/L respectively when these were used as carbon substrates in the fermentation process. Figures 4 and 5 showed the results.

#### CONCLUSION

Crude glycerol, with its high pH of 11.8 and low glycerol content of 27.68% is the principal by-product when biodiesel is produced via the transesterification of *jatropha* oil using a potassium hydroxide catalyst. To increase the purity, sulfuric acid is used, and the optimal concentration for this step was shown to be 5% (w/w), since it resulted in the highest glycerol sample purity level of 94.43%. The 30 g/L samples of crude and purified glycerol were then used in the anaerobic fermentation process at 37 °C for 120 hours to produce ethanol using *E. aerogenes*. The crude and purified glycerol served as a carbon source to produce 6.54 and 8.39 g/L respectively of ethanol. The ethanol which was produced using this approach involving by-product glycerol was shown to be highly efficient in comparison with the ethanol produced using commercial glycerol, which would yield 7.46 g/L under similar conditions.

#### ACKNOWLEDGEMENTS

This research was financially supported by Kasetsart University Research and Development Institute (KURDI) and King Mongkut's University of Technology Thonburi Thailand.

#### REFERENCES

- Hu, H., Wood, T.K. An evolved *Escherichia coli* strain for producing hydrogen and ethanol from glycerol. *Biochem. Biophys. Res. Commun.*, 2010; **391**: 1033-1038.

2. Karve, M., Patel, J.J., Patel, N.K. Bioconversion of glycerol. *J. Crit. Rev.*, 2014; **1**(1): 29-35.
3. Nwachukwu, R., Shahbazi, A., Wang, L., Ibrahim, S., Worku, M., Schimmel, K. Bioconversion of glycerol to ethanol by a mutant *Enterobacter aerogenes*. *AMB Express*, 2012; **2**(20): 1-6.
4. Milazzo, M.F., Spina, F., Vinci, A., Espro, C., Bart, J.C.J. Brassica biodiesels: past, present and future. *Renew. Sust. Energ. Rev.*, 2013; **18**(C): 350-389.
5. Demirbas, M.F., Balat, M. Recent advances on the production and utilization trends of biofuels: a global perspective. *Energ. Convers. Manage.*, 2006; **47**(15): 2371-2381.
6. Nabi, Md.N., Akhter, Md.S., Shahadat, M. Md.Z. Improvement of engine emissions with conventional diesel fuel and diesel-biodiesel blends. *Bioresour. Technol.*, 2006; **97**: 372-378.
7. Prueksakorn, K., Gheewala, S.H. Full chain energy analysis of biodiesel from *Jatropha curcas* L. in Thailand. *Environ. Sci. Technol.*, 2008; **42**(9): 3388-3393.
8. Yang, F., Hanna, M.A., Sun, R. Value-added uses for crude glycerol-a byproduct of biodiesel production. *Biotechnol. Biofuels*, 2012; **5**(13): 1-10.
9. González, P.M., Meynial, S.I., Mendes, F., Andrade, J.C., Vasconcelos, I., Soucaille, P. Metabolic engineering of *Clostridium acetobutylicum* for the industrial production of 1,3- propanediol from glycerol. *Metab. Eng.*, 2005; **7**: 329-336.
10. Choi, W.J., Hartono, M.R., Chan, W.H., Yeo, S.S. Ethanol production from biodiesel-derived crude glycerol by newly isolated *Kluyvera cryocrescens*. *Appl. Microbiol. Biot.*, 2011; **89**(4): 1255-1264.
11. Rossi, D.M., Da Costa, J.B., De Souza, E.A., Peralba, M.D.C.R., Ayub, M.A.Z. Bioconversion of residual glycerol from biodiesel synthesis into 1,3-propanediol and ethanol by isolated bacteria from environmental consortia. *Renew. Energ.*, 2012; **39**: 223-227.
12. Nwachukwu, R.E.S., Shahbazi, A., Wang, L., Worku, M., Ibrahim, S., Schimmel, K. Optimization of cultural conditions for conversion of glycerol to ethanol by *Enterobacter aerogenes* S012. *AMB Express*, 2013; **3**(12): 1-10.
13. Li, C., Lesnik, K.L., Liu, H. Microbial conversion of waste glycerol from biodiesel production into value-added products. *Energies*, 2013; **6**: 4739-4768.
14. Nimje, V.R., Chen, C.Y., Chen, C.C., Chen, H.R., Tseng, M.J., Jean, J.S., Chang, Y.F. Glycerol degradation in single-chamber microbial fuel cells. *Bioresour. Technol.*, 2011; **102**: 2629-2634.
15. Mangayil, R., Karp, M., Santala, V. Bioconversion of crude glycerol from biodiesel production to hydrogen. *Int. J. Hydrogen Energy*, 2012; **37**: 12198-12204.
16. Nicol, R.W., Marchand, K., Lubitz, W.D. Bioconversion of crude glycerol by fungi. *Appl. Microbiol. Biotechnol.*, 2012; **93**: 1865-1875.
17. González, P.M., Andrade, J.C., Vasconcelos, I. Production of 1,3-propanediol by *Clostridium butyricum* VPI 3266 in continuous cultures with high yield and productivity. *J. Ind. Microbiol. Biotech.*, 2005; **32**(9): 391-396.
18. Astals, S., Ariso, M., Gali, A., Mata-Alvarez, J. Co-digestion of pig manure and glycerine: experimental and modeling study. *J. Environ. Manage.*, 2011; **92**: 1091-1096.
19. Szymanowska-Powałowska, D. 1,3-Propanediol production from crude glycerol by *Clostridium butyricum* DSP1 in repeated batch. *Electron. J. Biotech.*, 2014; **17**: 322-328.
20. Papanikolaou, S., Muniglia, L., Chevalot, I., Aggelis, G., Marc, I. *Yarrowia lipolytica* as a potential producer of citric acid from raw glycerol. *J. Appl. Microbiol.*, 2002; **92**: 737-744.
21. Lee, P.C., Lee, W.G., Lee, S.Y., Chang, H.N. Succinic acid production with reduced by-product formation in the fermentation of *A. succiniciproducens* using glycerol as a carbon. *Biotechnol. Bioeng.*, 2001; **72**: 41-48.
22. Ngo, T.A., Kim, M.S., Sim, S.J., High-yield biohydrogen production from biodiesel manufacturing waste by *Thermotoga neapolitana*. *Int. J. Hydrogen Energy*, 2011; **36**: 5836-5842.
23. Selembo, P.A., Perez, J.M., Lloyd, W.A., Logan, B.E. High hydrogen production from glycerol or glucose by electrohydrogenesis using microbial electrolysis cells. *Int. J. Hydrogen Energy*, 2009; **34**: 5373-5378.
24. Ito, T., Nakashimada, Y., Senba, K., Matsui, T., Nishio, N. Hydrogen and ethanol production from glycerol-containing wastes discharged after biodiesel manufacturing process. *J. Biosci. Bioeng.*, 2005; **100**(3): 260-265.
25. Hazimah, A.H., Ooi, T.L., Salmah, A. Recovery of glycerol and diglycerol from glycerol pitch. *J. Oil Palm Res.*, 2003; **15**(1): 1-5.

© The Author(s) 2016. **Open Access.** This article is distributed under the terms of the [Creative Commons Attribution 4.0 International License](https://creativecommons.org/licenses/by/4.0/) which permits unrestricted use, sharing, distribution, and reproduction in any medium, provided you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons license, and indicate if changes were made.